


Professional Accumulator

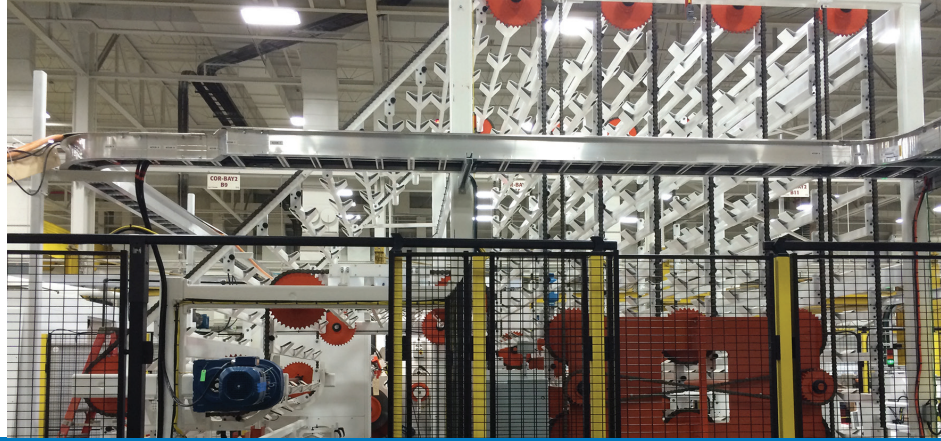

BUFFERS STORED LOGS TO MAINTAIN CONSISTENT PRODUCTION

KEY ADVANTAGES

- Extensive fault detection
- Welded tubular steel side frames
- Tubular buckets
- Tubular steel with welded, bent steel cradles

MAJOR OPTIONS

- Feed one or two saws

SPECIFICATIONS

Maximum speed	18 logs/min.
Design	First in - first out
Maximum log length	2850mm (112.2")
	3250mm (128.0")

Products	Surge Capacity	Maximum Log Diameter
Hardwound Towel	51 Logs (129 buckets)	215.9mm (8.5")
Jumbo Roll Tissue	34 Logs (86 buckets)	350mm (13.78")