


# Rotoseal V & Rotoseal Ultra

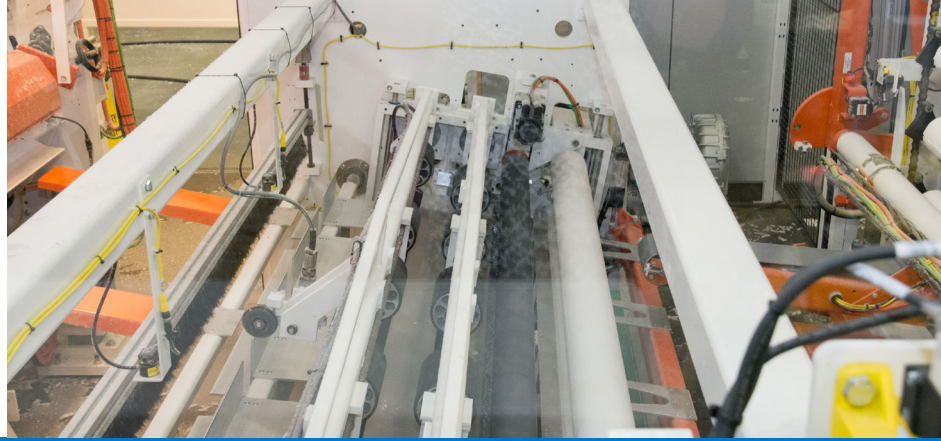

PROVIDING RELIABLE TAIL SEALING FOR PRODUCTION LINES AT VARIOUS SPEEDS

## KEY ADVANTAGES

- Easy setup
- Separate pairs of rollers for tail location and unwinding
- Adhesive applied to roll via cable

## MAJOR OPTIONS

- Infeed for a surface rewinder or center rewinder
- Cull conveyor(s)

## SPECIFICATIONS

### Rotoseal Ultra

Maximum cycle rate	60 logs/min
Tail length tolerance	$\pm 6.5\text{mm}$ ( $\pm 0.25''$ ) (measured at the center of the log)
Log diameter range	88.9-165.1mm (3.5-6.5")
Tail length range	12-37mm (0.5-1.5")
Log length range:	up to 3.5m (138")

### Rotoseal V

Maximum cycle rate	35 logs/min
Tail length tolerance	$\pm 6.5\text{mm}$ ( $\pm 0.25''$ ) (measured at the center of the log)
Log diameter range	88.9-165.1mm (3.5-6.5")
Tail length range	12-37mm (0.5-1.5")
Log Length range	up to 2.85m (112.2")