


Rotoseal V & Rotoseal Ultra

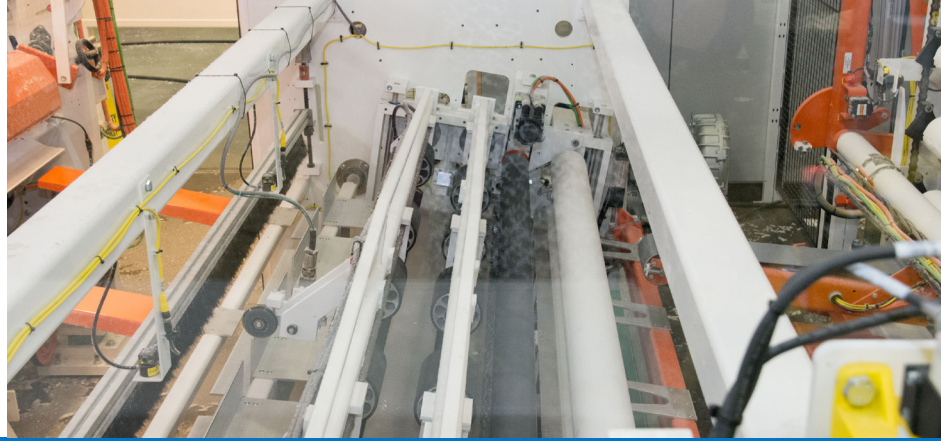

PROVIDING RELIABLE TAIL SEALING FOR PRODUCTION LINES AT VARIOUS SPEEDS

KEY ADVANTAGES

- Easy setup
- Separate pairs of rollers for tail location and unwinding
- Adhesive applied to roll via cable

MAJOR OPTIONS

- Infeed for a surface rewinder or center rewinder
- Cull conveyor(s)

SPECIFICATIONS


Rotoseal Ultra

Maximum cycle rate	60 logs/min
Tail length tolerance	±6.5mm (±0.25") (measured at the center of the log)
Log diameter range	88.9-165.1mm (3.5-6.5")
Tail length range	12-37mm (0.5-1.5")
Log length range:	up to 3.5m (138")

Rotoseal V

Maximum cycle rate	35 logs/min
Tail length tolerance	±6.5mm (±0.25") (measured at the center of the log)
Log diameter range	88.9-165.1mm (3.5-6.5")
Tail length range	12-37mm (0.5-1.5")
Log Length range	up to 2.85m (112.2")

Rotoseal HS200

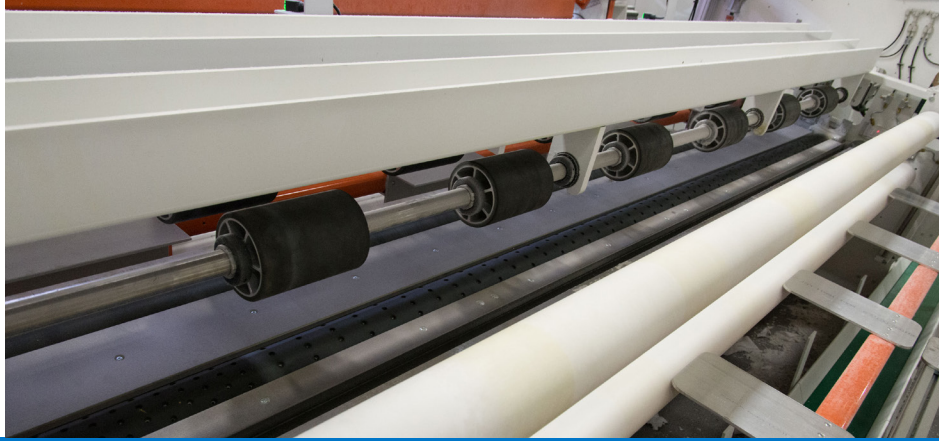

OUR CONSUMER TAILSEAL OFFERING A SCALABLE, UPGRADEABLE PACKAGE

KEY ADVANTAGES

- Easy setup
- Expanded log diameter range
- Adhesive applied to log via cable

MAJOR OPTIONS

- Infeed for a surface rewinder or center rewinder
- Cull conveyor(s)
- Pushbutton log diameter adjustment via servo motor
- Cycle rate upgrades

SPECIFICATIONS

Rotoseal HS200

Maximum cycle rates	35 logs/min 45 logs/min 60 logs/min
Maximum log lengths	2850mm (112.2") 3650mm (143.7")
Log diameter range	88.9 - 200mm (3.5 - 7.87")
Tail length range	12 - 38mm (0.5 - 1.5")