


VW Embosser

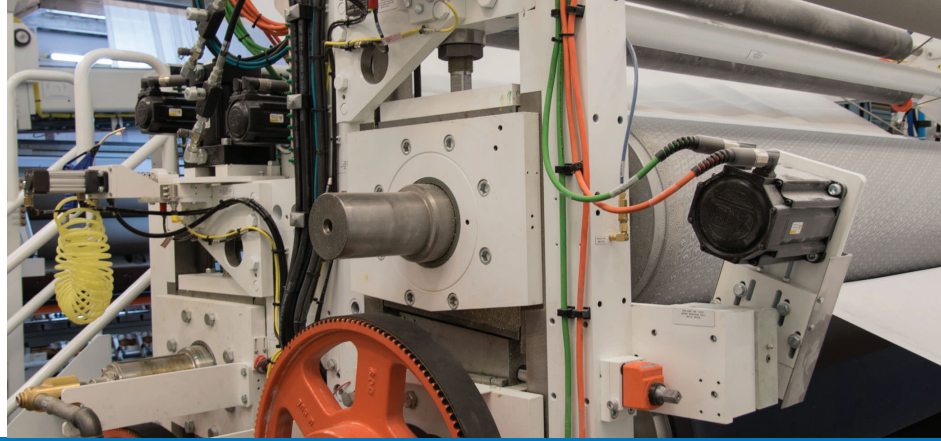

CONFIGURABLE FOR ENHANCING ONE OR TWO WEBS

KEY ADVANTAGES

- High speed industrial applications
- Versatility of product enhancement

MAJOR OPTIONS

- One or two stations
- Matched steel embosser
- Rubber-steel embosser/calender
- Bypass idlers
- Closed loop embossing interference control

SPECIFICATIONS

Maximum web speed	914mpm (3000fpm)
Frame thickness	Standard: 4"
Steel roll diameter	Standard: 400-457mm (15.75-18.00")
	Wide, high pli applications: 463.6-521mm (18.25-20.50")
Maximum nip load	613N/cm (350pli)